



DOVE WATER

DOVE 5000

- ✿ LG parts and components
- ✿ Taller design for more comfortable dispensing height
- ✿ Innovative design & technology
- ✿ Stainless steel reservoirs
- ✿ State-of-the-art filtration and sanitization
- ✿ Enhanced alkalinity
- ✿ Nutrient boost from added minerals
- ✿ Built-in leak detection system
- ✿ Clean, fresh tasting water




DOVE 5000



Specifications

DESCRIPTION	SPECIFICATION
Weight	60 lbs
Dimensions	50" h x 11.8" w x 13.75" d
Colors	Black and white
Cold Tank Capacity	1.5 gallons/5.7 liters
Hot Tank Capacity	0.7 gallons/2.7 liters
Dispense Height	8.5"
Recommended Water Pressure	60-70 psi
Rated Voltage/Frequency	110v/60Hz @ 4.9 amps
Power Consumption	1.60 kWh/24 hours

Multi-Stage Purification Process

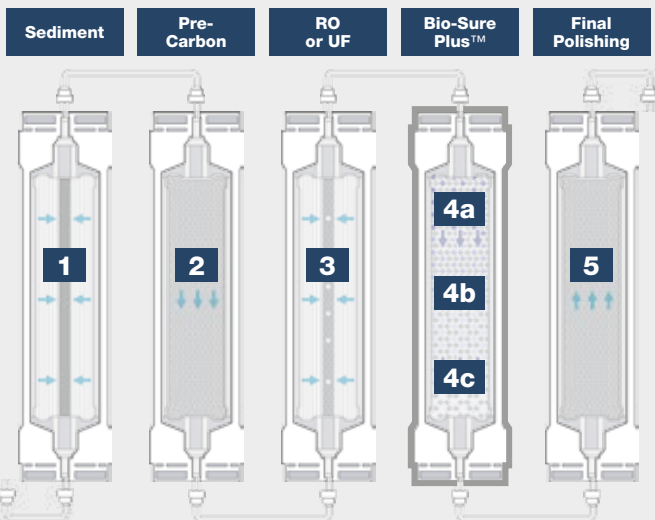

- 1 Sediment Filter**
Reduces particles such as dirt, silt, rust and pipe residue.
- 2 Pre-Carbon Filter**
Reduces chlorine, chemicals and pesticides.
- 3 Reverse Osmosis (RO) or Ultra Filtration (UF) Membrane**
Reduces solids, arsenic, bacteria, viruses, pharmaceuticals, and metals.
- 4 BIO-SURE PLUS™ FILTER**
 - 4a Restores/Adds Minerals & Electrolytes**
More than 20 minerals and electrolytes are added.
 - 4b Enhances Alkalinity**
Water is enhanced with minerals to increase alkalinity.
 - 4c Sanitizes Water**
Colloidal silver is used to maintain the cleanliness of the waterway.
- 5 Final Polishing Filter**
Coconut shell carbon polishes the water for great taste.